




O型環標準尺寸公制規格表

JIS B2401 S (公制單位 mm)

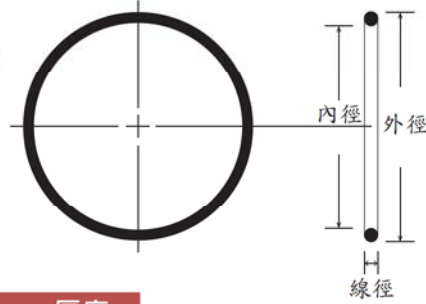

規格	內徑	外徑	厚度
S-2	1.5	4.5	1.5
S-3	2.5	5.5	1.5
S-4	3.5	6.5	1.5
S-5	4.5	7.5	1.5
S-6	5.5	8.5	1.5
S-7	6.5	9.5	1.5
S-8	7.5	10.5	1.5
S-9	8.5	11.5	1.5
S-10	9.5	12.5	1.5
S-11.2	10.7	13.7	1.5
S-12	11.5	14.5	1.5
S-12.5	12	15	1.5
S-14	13.5	16.5	1.5
S-15	14.5	17.5	1.5
S-16	15.5	18.5	1.5
S-18	17.5	20.5	1.5
S-20	19.5	22.5	1.5
S-22	21.5	24.5	1.5
S-22.4	21.9	25.9	2
S-24	23.5	27.5	2
S-25	24.5	28.5	2
S-26	25.5	29.5	2
S-28	27.5	31.5	2
S-29	28.5	32.5	2
S-30	29.5	33.5	2
S-31.5	31	35	2
S-32	31.5	35.5	2
S-34	33.5	37.5	2
S-35	34.5	38.5	2
S-35.5	35	39	2
S-36	35.5	39.5	2
S-38	37.5	41.5	2
S-39	38.5	42.5	2
S-40	39.5	43.5	2
S-42	41.5	45.5	2
S-44	43.5	47.5	2
S-45	44.5	48.5	2
S-46	45.5	49.5	2
S-48	47.5	51.5	2
S-50	49.5	53.5	2
S-53	52.5	56.5	2
S-55	54.5	58.5	2
S-56	55.5	59.5	2
S-60	59.5	63.5	2
S-63	62.5	66.5	2
S-65	64.5	68.5	2
S-67	66.5	70.5	2
S-70	69.5	73.5	2
S-71	70.5	74.5	2

規格	內徑	外徑	厚度
S-75	74.5	78.5	2
S-80	79.5	83.5	2
S-85	84.5	88.5	2
S-90	89.5	93.5	2
S-95	94.5	98.5	2
S-100	99.5	103.5	2
S-105	104.5	108.5	2
S-110	109.5	113.5	2
S-112	111.5	115.5	2
S-115	114.5	118.5	2
S-120	119.5	123.5	2
S-125	124.5	128.5	2
S-130	129.5	133.5	2
S-132	131.5	135.5	2
S-135	134.5	138.5	2
S-140	139.5	143.5	2
S-145	144.5	148.5	2
S-150	149.5	153.5	2
S-155	154.5	158.5	2
S-160	159.5	163.5	2
S-165	164.5	168.5	2
S-170	169.5	173.5	2
S-175	174.5	178.5	2
S-180	179.5	183.5	2
S-185	184.5	188.5	2
S-190	189.5	193.5	2
S-195	194.5	198.5	2
S-200	199.5	203.5	2
S-205	204.5	208.5	2
S-210	209.5	213.5	2
S-215	214.5	218.5	2
S-220	219.5	223.5	2
S-225	224.5	228.5	2
S-230	229.5	233.5	2
S-235	234.5	238.5	2
S-240	239.5	243.5	2
S-245	244.5	248.5	2
S-250	249.5	253.5	2
S-255	254.5	258.5	2
S-260	259.5	263.5	2
S-265	264.5	268.5	2
S-270	269.5	273.5	2
S-275	274.5	278.5	2
S-280	279.5	283.5	2
S-285	284.5	288.5	2
S-290	289.5	293.5	2
S-295	294.5	298.5	2
S-300	299.5	303.5	2