




# O型環標準尺寸公制規格表

## JIS B2401 V (公制單位 mm)

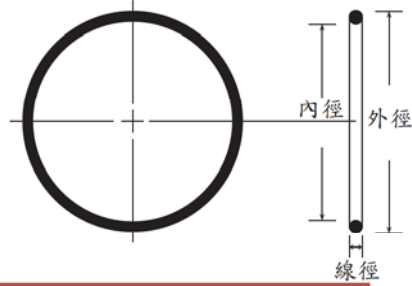

規格	內徑	外徑	厚度	規格	內徑	外徑	厚度	規格	內徑	外徑	厚度
V-10	9.5	17.5	4	V-155	153	161	4	V-420	416	428	6
V-11	10.5	18.5	4	V-160	158	166	4	V-425	421	433	6
V-12	11.5	19.5	4	V-170	168	176	4	V-430	425.5	437.5	6
V-14	13.5	21.5	4	V-175	173	181	4	V-435	430.5	442.5	6
V-15	14.5	22.5	4	V-180	178	186	4	V-445	440.5	452.5	6
V-16	15.5	23.5	4	V-185	183	191	4	V-450	445.5	457.5	6
V-18	17.5	25.5	4	V-190	188	196	4	V-455	450.5	462.5	6
V-20	19.5	27.5	4	V-195	193	201	4	V-460	455.5	467.5	6
V-21	20.5	28.5	4	V-200	198	206	4	V-465	460.5	472.5	6
V-22	21.5	29.5	4	V-205	203	211	4	V-470	465.5	477.5	6
V-24	23.5	23.5	4	V-210	208	216	4	V-475	470.5	482.5	6
V-25	24.5	32.5	4	V-215	213	221	4	V-480	475	495	10
V-26	25.5	33.5	4	V-220	218	226	4	V-490	485	505	10
V-28	27.5	35.5	4	V-225	222.5	234.5	6	V-500	494.5	514.5	10
V-30	29.5	37.5	4	V-230	227.5	239.5	6	V-510	504.5	524.5	10
V-32	31.5	39.5	4	V-235	232.5	244.5	6	V-520	514.5	534.5	10
V-34	33.5	33.5	4	V-240	237.5	249.5	6	V-530	524.5	544.5	10
V-35	34.5	42.5	4	V-245	242.5	254.5	6	V-540	534	554	10
V-36	35.5	43.5	4	V-250	247.5	259.5	6	V-550	544	564	10
V-38	37.5	45.5	4	V-255	252.5	264.5	6	V-560	554	574	10
V-40	39.5	47.5	4	V-260	257.5	269.5	6	V-570	564	584	10
V-42	41.5	49.5	4	V-265	262.5	274.5	6	V-580	574	594	10
V-44	43.5	51.5	4	V-270	267.5	279.5	6	V-585	579	599	10
V-45	44.5	52.5	4	V-275	272	284	6	V-590	584	604	10
V-46	45.5	53.5	4	V-280	277	289	6	V-600	593	613	10
V-48	47.5	55.5	4	V-285	282	294	6	V-610	603.5	623.5	10
V-50	49.5	57.5	4	V-290	287	299	6	V-620	613.5	633.5	10
V-53	52.5	60.5	4	V-295	292	304	6	V-630	623.5	643.5	10
V-55	54.5	62.5	4	V-300	297	309	6	V-640	633.5	653.5	10
V-56	55.5	63.5	4	V-305	302	314	6	V-650	643	663	10
V-58	57.5	65.5	4	V-310	307	319	6	V-660	653	673	10
V-60	59.5	67.5	4	V-315	312	324	6	V-670	663	683	10
V-63	62.5	70.5	4	V-320	317	329	6	V-680	673	693	10
V-65	64.5	72.5	4	V-325	321.5	333.5	6	V-690	683	703	10
V-67	66.5	74.5	4	V-330	326.5	338.5	6	V-700	692.5	712.5	10
V-70	69	77	4	V-335	331.5	343.5	6	V-710	702.5	722.5	10
V-75	74	82	4	V-340	336.5	348.5	6	V-720	712.5	732.5	10
V-80	79	87	4	V-345	341.5	353.5	6	V-730	722.5	742.5	10
V-85	84	92	4	V-350	346.5	358.5	6	V-740	732.5	752.5	10
V-90	89	97	4	V-355	351.5	363.5	6	V-750	742	762	10
V-95	94	102	4	V-360	356.5	368.5	6	V-760	752	772	10
V-100	99	107	4	V-365	361.5	373.5	6	V-770	762	782	10
V-105	104	112	4	V-370	366.5	378.5	6	V-780	772	792	10
V-110	109	117	4	V-375	371.5	383.5	6	V-790	782	802	10
V-115	114	122	4	V-380	376	388	6	V-800	791.5	811.5	10
V-120	119	127	4	V-385	381	393	6	V-810	801.5	821.5	10
V-125	124	132	4	V-390	386	398	6	V-820	811.5	831.5	10
V-130	129	137	4	V-395	391	403	6	V-830	821.5	841.5	10
V-135	134	142	4	V-400	396	408	6	V-840	831.5	851.5	10
V-140	138.5	146.5	4	V-405	401	413	6	V-845	836.5	856.5	10
V-145	143.5	151.5	4	V-410	406	418	6	V-950	940.5	960.5	10
V-150	148.5	156.5	4	V-415	411	423	6	V-1055	1044	1064	10